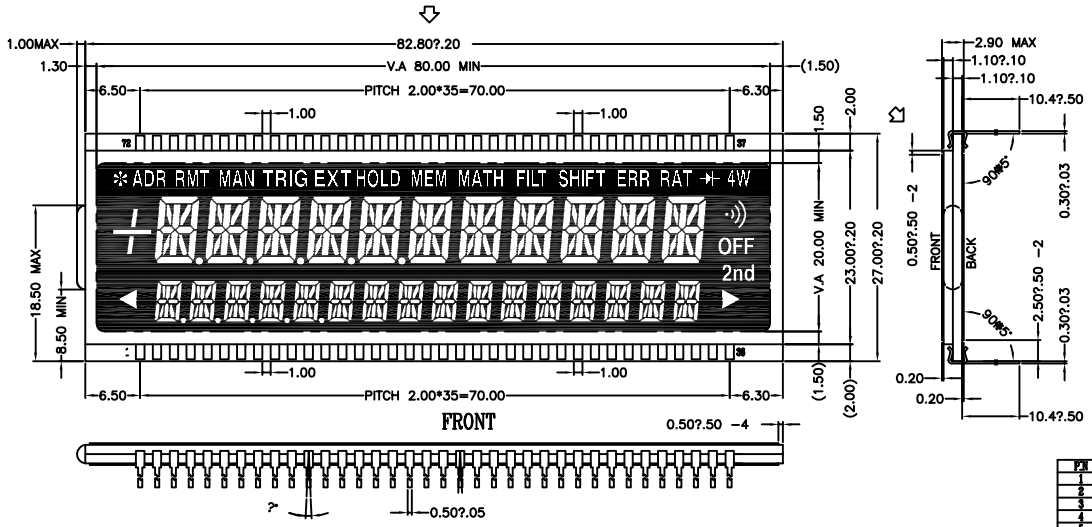

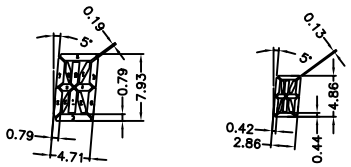

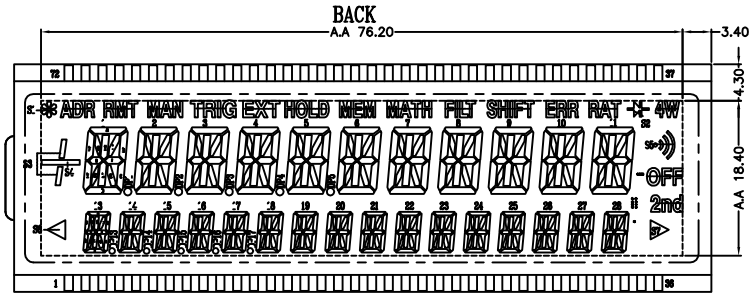

NOTE:13[•] CROSSING POINTS(0.05X0.05) IN V.A

PIN	COM1	COM2	COM3	COM4	COM5	COM6	COM7	COM8	PIN	COM1	COM2	COM3	COM4	COM5	COM6	COM7	COM8
1	1G	1H	1N	1D	13C	13H	13M	13D	37	4F	/	/	/	27B	27J	27C	/
2	1A	1I	1L	1K	13A	13I	13L	13K	38	/	/	/	/	27A	27.	27L	27K
3	/	/	/	DP2	14F	14N	14I	/	39	/	/	/	/	27G	27J	27M	27D
4	2G	2H	2M	2D	14A	14I	14L	14K	40	S2	/	/	/	27F	27N	27K	/
5	2A	2I	2L	2K	14B	14J	14C	DP14	41	RAT	11B	11J	11C	28B	28J	28C	/
6	/	/	/	DP3	15C	15H	15M	15D	42	1A	11I	11L	11K	28A	28.	28L	28K
7	/	/	/	DP3	15A	15I	15L	15K	43	1G	11H	11M	11D	28G	28I	28M	28D
8	/	/	/	DP4	17B	17J	17C	DP17	44	/	11F	11N	11E	28F	28N	28E	/
9	/	S1	5M	5E	18F	18N	18E	/	45	KSR	10B	10J	10C	25B	25J	25C	/
10	5G	5H	5M	5D	18C	18H	18M	18D	46	10A	10I	10L	10K	25A	25.	25L	25K
11	5A	5I	5L	5K	18A	18I	18L	18K	47	10G	10E	10M	10D	25G	25I	25M	25D
12	/	5B	5J	5C	16B	16J	16C	/	48	SHIFT	10F	10N	10E	25F	25N	25E	/
13	/	/	/	/	19F	19N	19I	/	49	FIL	9B	9J	9C	24B	24J	24C	/
14	/	/	/	/	19C	19H	19M	19D	50	9A	9I	9L	9K	24A	24.	24L	24K
15	/	/	/	/	19A	19I	19L	19K	51	9G	9H	9M	9D	24G	24I	24M	24D
16	/	/	/	DP5	19B	19J	19C	/	52	/	9F	9N	9E	24F	24N	24E	/
17	/	S2	6M	6E	22F	22N	22E	/	53	MATH	7B	7J	7C	21B	21J	21C	/
18	6G	6H	6M	6D	22C	22H	22M	22D	54	7A	7I	7L	7K	21A	21.	21L	21K
19	6A	6I	6L	6K	22A	22I	22L	22K	55	7G	7H	7M	7D	21G	21I	21M	21D
20	/	6B	6J	6C	23B	23J	23C	/	56	/	7F	7N	7E	21F	21N	21E	/
21	/	/	/	/	23F	23N	23E	/	57	MEM	6B	6J	6C	20B	20J	20C	/
22	/	/	/	/	23C	23H	23M	23D	58	6A	6I	6L	6K	20A	20.	20L	20K
23	/	/	/	/	23A	23I	23L	23K	59	6G	6H	6M	6D	20G	20I	20M	20D
24	/	/	/	/	23B	23J	23C	/	60	HOLD	6F	6N	6E	20F	20N	20E	/
25	/	/	/	/	26F	26N	26E	/	61	RMT	4B	4J	4C	17A	17.	17L	17K
26	/	/	/	/	26C	26H	26M	26D	62	4A	4I	4L	4K	17G	17I	17M	17D
27	/	/	/	/	26A	26I	26L	26K	63	4G	4E	4M	4D	17F	17N	17E	/
28	S5	OFF	2nd	S7	26B	26J	26C	/	64	TRIG	2F	2N	2E	16B	16J	16C	DP16
29	/	/	/	/	/	/	/	COM8	65	MAN	3B	3J	3C	16G	16I	16M	16D
30	/	/	/	/	/	/	COM7	/	66	3A	3I	3L	3K	16F	16N	16E	/
31	/	/	/	/	/	COM6	/	/	67	3G	3H	3M	3D	15B	15J	15C	DP15
32	/	/	/	/	COM5	/	/	/	68	ADR	3F	3N	3E	15A	15I	15L	15K
33	/	/	/	COM4	/	/	/	/	69	ADR	2B	2J	2C	15F	15N	15E	/
34	/	/	COM3	/	/	/	/	/	70	S1	2F	2N	2E	14G	14I	14M	14D
35	/	COM2	/	/	/	/	/	/	71	S3	1B	1J	1C	13B	13J	13C	DP13
36	COM1	/	/	/	/	/	/	/	72	S4	1F	1N	1E	13F	13N	13E	36

1.Display mode: DFSTN/NEGATIVE/TRANSIMISSIVE, Viewing angle: 12 O'clock	Count drawing & Spec.revision record during discussion with customer			JASONIC TECHNOLOGY LIMITED		
2.Driving condition: 1/8Duty,1/4Bias, Vop: 5.0V						SCALE / SHEET
3.Operating temp: -20°C~80°C, Storage temp: -30°C~85°C						
4.Back light: Non	Rec.	Revision content description	Date	Mod.Name	GP0229A0	NTS / 1/1
5.Back light color chromaticity:	#00	FIRST ISSUE	2015.06.30			
6.Uniformity of the lightguide more then 80%				UNIT / SIZE / DESIGNER / CHECK / APPROVER		FILE NAME
7.Unspecified tolerance : ±0.20mm						
8.Remark : ROHS				mm / A4		Count Dwg.