
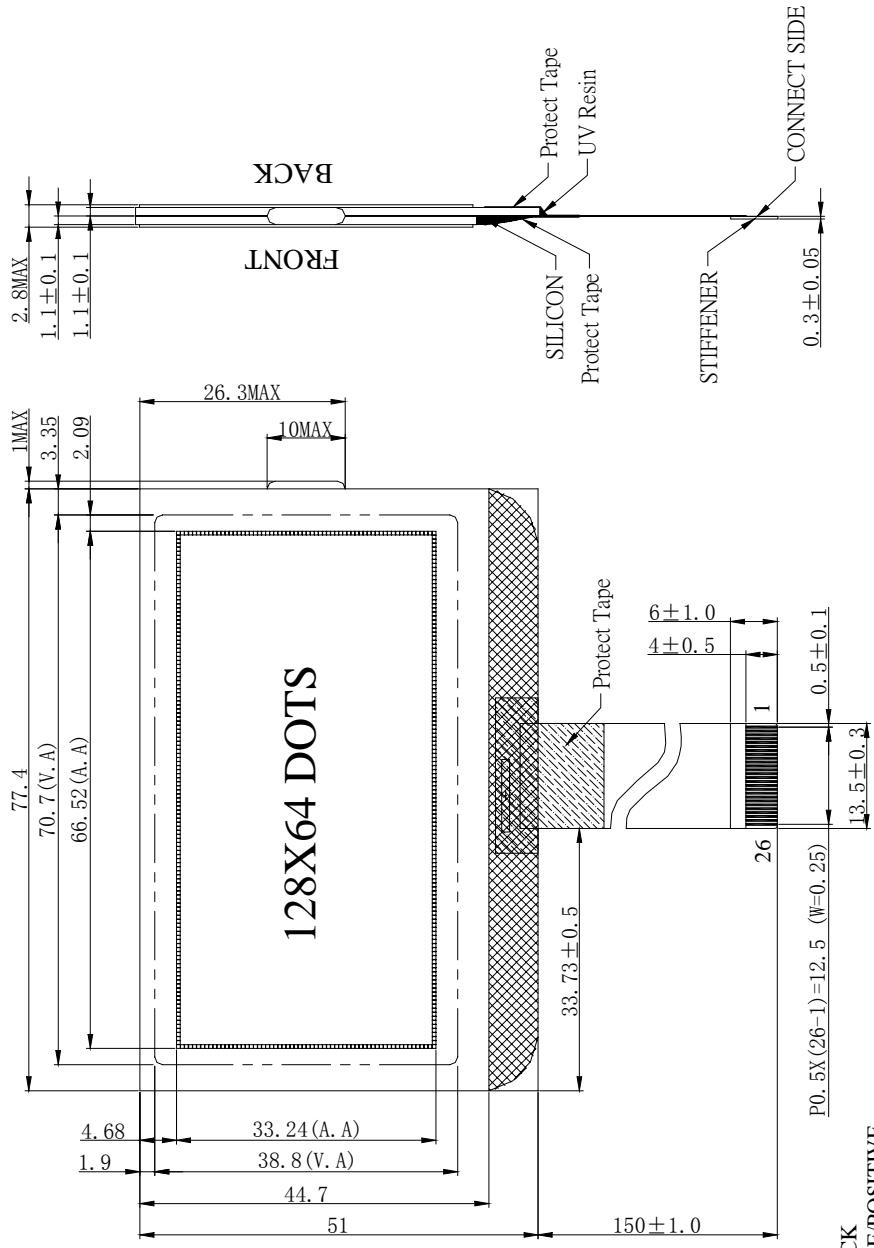


PIN FUNCTION:

NO	SYMBOL	NO	SYMBOL
1	/CS1	14	VDD
2	/RES	15	VSS
3	A0	16	VOUT
4	/WR	17	CAP3P
5	/RD	18	CAP1N
6	D0	19	CAP1P
7	D1	20	CAP2P
8	D2	21	CAP2N
9	D3	22	V4
10	D4	23	V3
11	D5	24	V2
12	D6	25	V1
13	D7	26	V0



- NOTES:
- 1.DISPLAY TYPE:FSTN
 - 2.VIEWING DIRECTION:6 O'CLOCK
 - 3.POLARIZER MODE:REFLECTIVE/POSITIVE
 - 4.DRIVE METHOD:1/65 DUTY 1/9 BIAS
 - 5.LCD DRIVE VOLTAGE:10.3V
 - 6.LOGIC POWER SUPPLY VOLTAGE:3.0V
 - 7.OPREATING TEMP:-20°C~+70°C
 - 8.STORAGE TEMP:-30°C~+80°C
 - 9.IC:ST7565P
 - 10.CONNECTION TYPE:COG

$P0.5X(26-1)=12.5 (W=0.25)$