
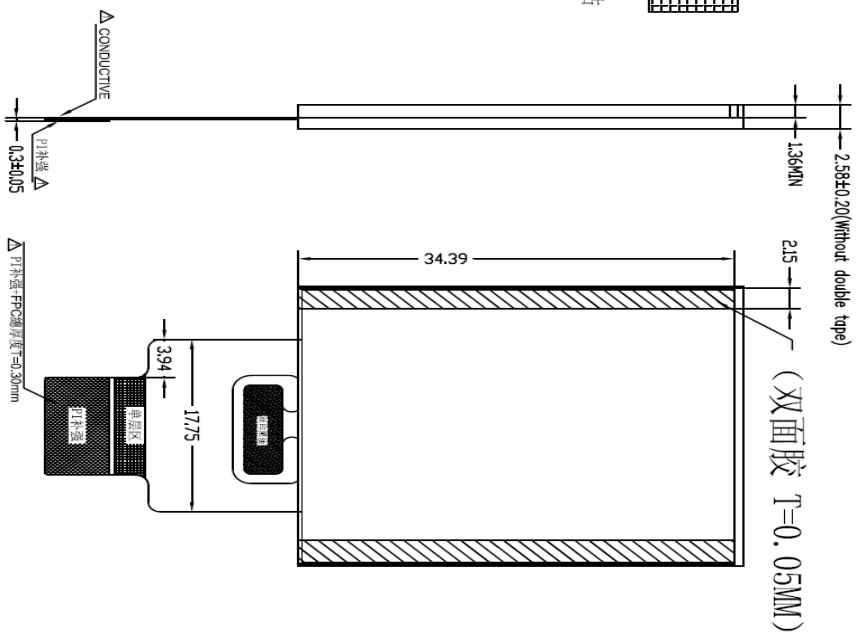


- NOTES:
1. General Tolerance: ±0.3
 2. () reference dimension.
 3. Recommended case open area should be less than module V.A
 4. Recommended cushion adherent area: TP V.A+1.6mm
 5. RoHS must be compliant.

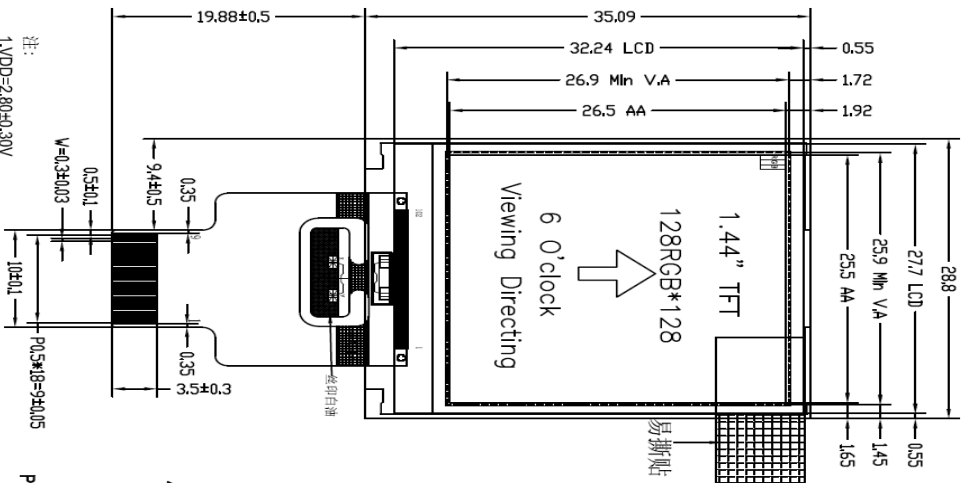

PIN	DESCRIPTION
1	VDD
2	VDD
3	RDX
4	D/CX
5	D1
6	D3
7	D5
8	D7
9	RESET
10	CSX
11	D6
12	D4
13	D2
14	D0
15	LED-
16	LED+
17	WRX
18	GND
19	GND

Display Type	TFT/NORMAL black
Optimum Viewing Direction	6 O'clock
TOP Floorderizer Type	S177355
LCD Driver IC	
Operating Voltage	-20°C TO 70°C
Operating Temperature	-30°C TO 80°C
Storage Temperature	
Interface	MCU 8-bit Parallel Interface
Backlight	1-CHIP WHITE LED
Surface Luminance	150 CD/M2
White X/Y	TBD

VER.	SYMBOL	AMENDMENT	SIGN	DATE	CUSTOMER'S APPROVAL	TITLE	DRAWING NO.
V00		First issue		2017.7.25		MODULE SPEC.	JT144MGPSV02